

DUOMAX twin

390-410W

出力範囲

20.0%

最大変換効率

0~+5W

出力許容公差





従来通りの設置方法




- フレーム付きデザインなので、従来の工法で架台への取付が可能
- 従来のフレーム付きモジュール同様、運搬の取扱が容易

トリナ・ソーラーのDUOMAX出力保証

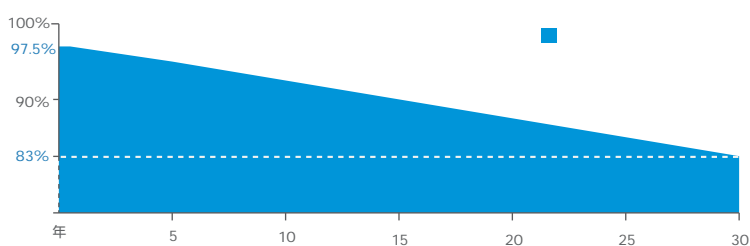

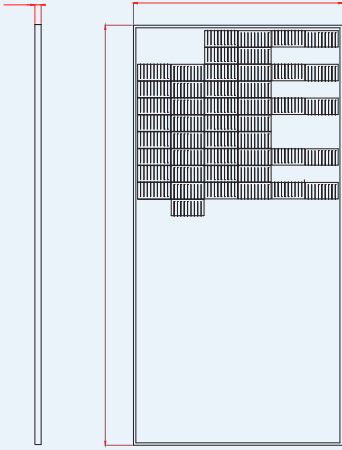



表面図

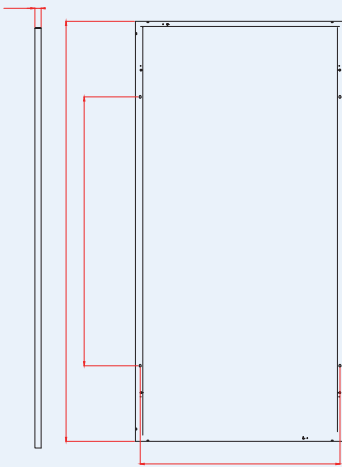

背面図

6-接地穴
12-水抜き穴

A-A

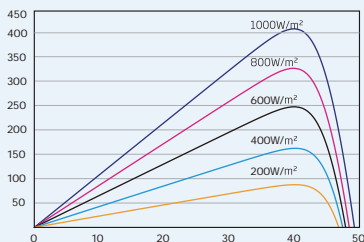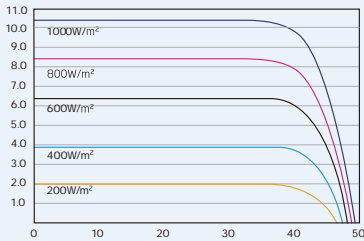

	390	395	400	405	410
	0 ~ +5				
	40.2	40.5	40.8	41.1	41.4
	9.71	9.76	9.81	9.86	9.91
	48.5	48.7	48.9	49.1	49.3
	10.25	10.29	10.33	10.37	10.41
	19.0	19.2	19.5	19.7	20.0

	425	446	466	486	506
	41.1	41.1	41.1	41.1	41.1
	10.35	10.85	11.34	11.83	12.33
	49.2	49.3	49.4	49.5	49.6
	10.89	11.41	11.93	12.44	12.96
	5%	10%	15%	20%	25%

Power Bifaciality: 70±5%.

	295	299	302	306	310
	37.7	38.0	38.3	38.6	38.9
	7.82	7.86	7.90	7.93	7.97
	45.7	45.9	46.1	46.3	46.5
	8.26	8.29	8.33	8.36	8.39

单結晶
144 セル (6 × 24)
2031 × 1011 × 30mm
26.8 kg
POE/EVA

41°C (±3°C)
-0.35%/°C
-0.25%/°C
0.04%/°C

-40~+85°C
1500V DC (IEC)
1500V DC (UL)
20A