


# DUOMAX

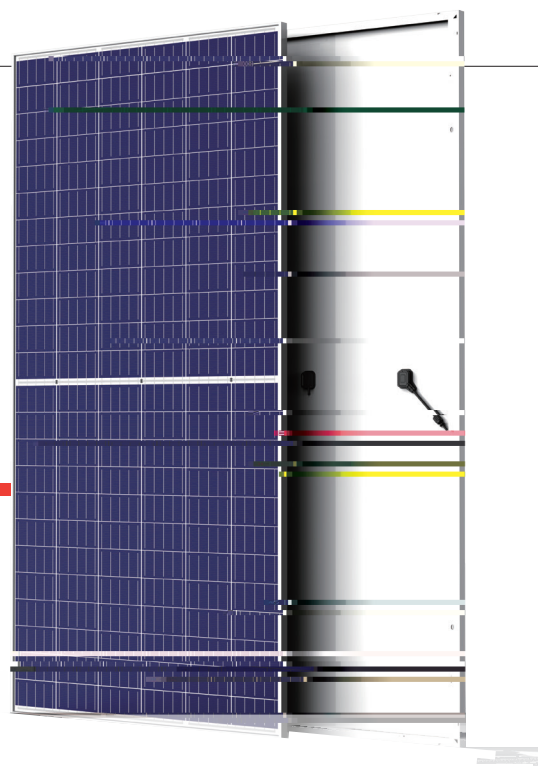

**340-355W**

出力範囲

**17.3%**

最大変換効率


**0~+5W**

出力許容公差



- フレーム付きデザインなので、従来の工法で架台への取付が可能
- 従来のフレーム付きモジュール同様、運搬の取扱が容易

トリナ・ソーラーのDUOMAX出力保証

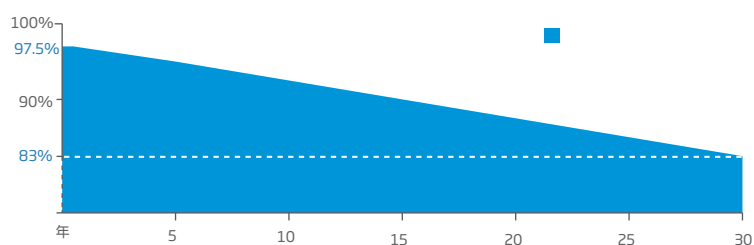


	多結晶
	144 セル (6 × 24)
	2031 × 1011 × 30 mm
	26.8 kg
	EVA

	41°C (±3°C)
	- 0.38%/°C
	- 0.31%/°C
	0.05%/°C

	-40~+85°C
	1500V DC (IEC)
	1500V DC (UL)
	20A

